


AUTOMATIC SOLUTION FOR GATE

LOCKS FOR ALUMINIUM

SWING DOORS / PIVOT DOORS

AUTOMATIC MULTIPOINT LOCK, 92mm BETWEEN AXES

2A2NM RANGE **iself**

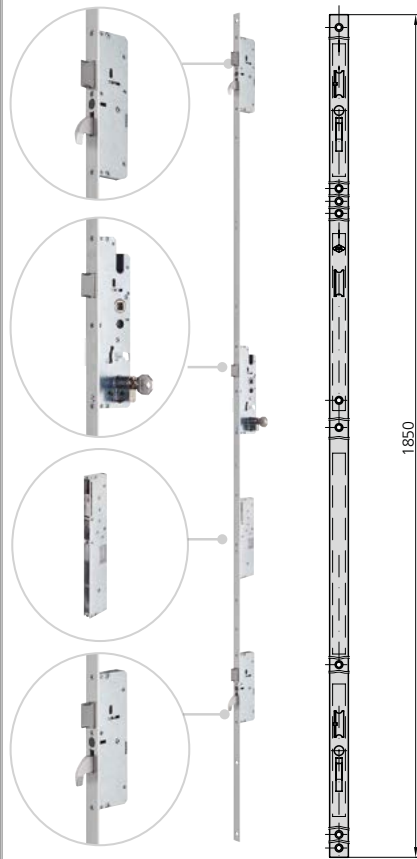

CHARACTERISTIC

- Automatic lock system by 3 latch bolts and 2 hook up/down dead bolts
- Automatic shooting of the (independent) hook up/down dead bolts by magnetic technology
- Box depth 15mm: avoids the machining of the profile at the back of the box
- Handle tied passing at 21,5mm ↓ and up to 45mm ↑
- 16mm, 22mm, 24mm SS flat front plate and 24,5*6 "U" shape SS front plate
- Reversible latch bolts through semi-automatic system
- 15mm closed box
- 8mm square ruler
- Strike plate according to the lock
- Cylinder set screw


VERSIONS

- Possibility of different front heights

OPTIONAL ACCESSORIES

- Complete range of **strike plates**
- Complete range of **cylinders**

DESCRIPTION	REF.	MEASUREMENTS		CAM	FINISH		UNITS
		B	A		FRONT PLATE	CYLINDER	

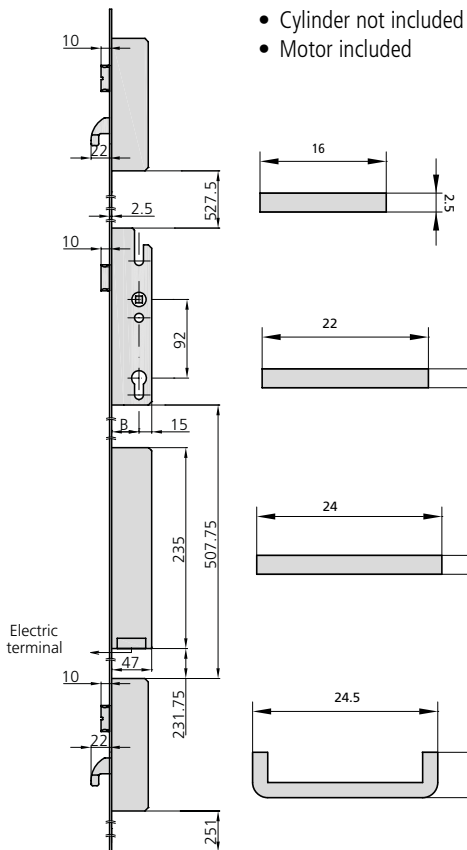

P2A2NM30/6	27	42	15	Al	1
P2A2NM35/6	32	47	15	Al	1
P2A2NM45/6	42	57	15	Al	1
P2A2NM60/6	57	72	15	Al	1
P2A2NM65/6	62	77	15	Al	1
2A2NM30/6L	27	42	15	Al	1
2A2NM35/6L	32	47	15	Al	1
2A2NM45/6L	42	57	15	Al	1
2A2NM60/6L	57	72	15	Al	1
2A2NM65/6L	62	77	15	Al	1
2A2NM30/6LAN	27	42	15	Al	1
2A2NM35/6LAN	30	45	15	Al	1
2A2NM45/6LAN	32	47	15	Al	1
2A2NM60/6LAN	57	72	15	Al	1
2A2NM65/6LAN	62	77	15	Al	1
2A2NM30/6U	23	38	15	Al	1
2A2NM35/6U	28	43	15	Al	1
2A2NM45/6U	38	53	15	Al	1
2A2NM60/6U	53	68	15	Al	1
2A2NM65/6U	58	73	15	Al	1